



GB 01 000 613

USA



INVESTOR IN PEOPLE

JC979 U.S. PTO  
10/046992



## CERTIFIED COPY OF PRIOR DOCUMENT

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated: 8 August 2001

**THIS PAGE BLANK (USPTO)**

**Request for grant of a patent**

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

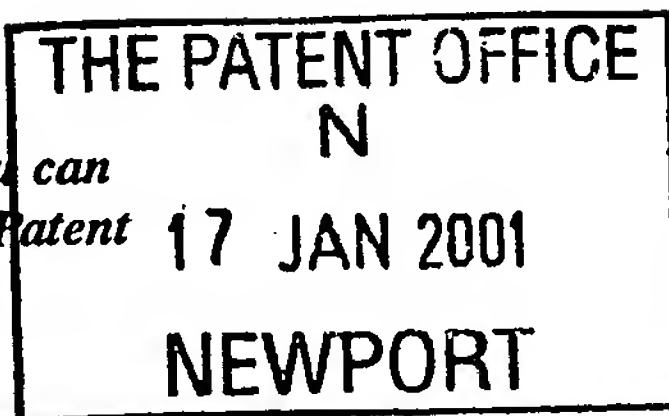

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

17 JAN 2001

1. Your reference	PHGB 010006		
2. Patent application number (The Patent Office will fill in this part)	<b>0101205.3</b>		<del>17JAN01 1508727-1 D02877</del> P01/7700 0.00-0101205.3
3. Full name, address and postcode of the or of each applicant ( <u>underline all surnames</u> )	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS 7586605002 IS		
Patents ADP Number (if you know it)  If the applicant is a corporate body, give the country/state of its incorporation	THE NETHERLANDS		
4. Title of the invention	TELECOMMUNICATIONS SYSTEM AND A METHOD OF OPERATING THE SYSTEM		
5. Name of your agent (if you have one)	KEVIN JAMES SCOTT		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  Patents ADP number (if you know it)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA 7688914001 IS		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents form

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document.

Continuation sheets of this form

Description	7
Claims(s)	3
Abstract	1
Drawings	2 only

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

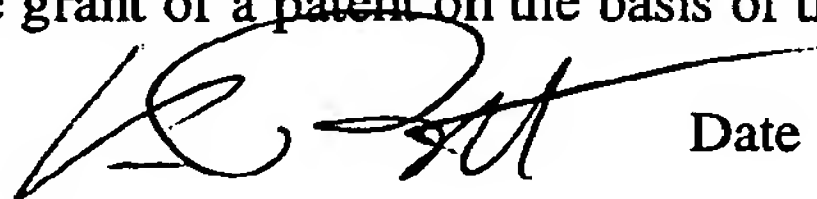

Date

16<sup>th</sup> January 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5281

K J SCOTT

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered "Yes" *Patents Form 7/77* will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## DESCRIPTION

TELECOMMUNICATIONS SYSTEM AND A METHOD OF  
OPERATING THE SYSTEM

5

The present invention relates to a telecommunications system, to a method of operating the system and to a secondary station for use in the system. The present invention has particular, but not exclusive, application to mobile telecommunications systems, such as cellular telephone systems, in which secondary stations in the form of portable wireless terminals can roam with respect to fixedly sited primary stations.

In contemporary telecommunications practice it is more than likely that a user will roam into geographical areas or countries in which the operating standard or protocol is different from a neighbouring area or country or access to one of several concurrently operating systems is not possible because of say congestion. As a consequence, in order to avoid the user having to carry several portable phones, each being adapted to operate in accordance with a particular standard, it is desirable that the user has one phone which can adapt itself to the currently available telecommunications system. In order that a portable phone can adapt not only to new systems for which it does not have the required software but also to upgrades of existing software, it has been frequently necessary for the user to take or send the mobile phone to a service centre or service provider to have the desired software changes effected.

Alternatively it may be possible to update the portable phone in other ways such as over the air by transmissions from the service provider by using the installed radio network. However the downloading of large amounts of software over the air interface to portable terminals would demand considerable bandwidth from the operator, which bandwidth could otherwise be used to generate revenue from users making calls or data traffic.

US Patent Specification 5,852,721 discloses a data transfer system using high speed, one-way links such as satellites and cable television lines



and low-speed networks as dial up telephones, ISDN D-channel, and low-speed satellite paths. A requesting terminal includes an interface that allows a user to select whether data downloaded from a network is transmitted to the requesting terminal via a high speed link or a lower speed link.

5 US Patent Specification 5,553,314 discloses configuring a cellular phone at start-up by the phone transmitting an application request to a portable configuration device over a secondary communication path, the device ascertains the appropriate information and transmits it back to the phone over the secondary communication path. Thereafter the phone is able  
10 to establish a primary two-way communication path with a basestation. Any updates in configuration data are effected to the portable configuration device by updating or replacing it and not to the phone itself.

US Patent Specification 5,689,825 discloses updating software to portable wireless communication units by placing the unit in a battery  
15 charger/software downloader which is coupled to the public communication network, which in turn is coupled by way of a server to a wireless network.

None of these proposals lend themselves to updating over the air configuration software held in a portable wireless terminal.

20 An object of the present invention is to be able to update configuration software held in a wireless terminal without adversely affecting significantly the revenue raising capacity of the wireless phone network.

According to a first aspect of the present invention there is provided a method of operating a radio system comprising a primary station and at least  
25 one secondary station, characterised by establishing a two-way communications link between the primary station and the at least one secondary station, by the primary station transmitting a configuration message to the at least one secondary station, by the at least one secondary station adapting itself to receive configuration information signals transmitted by a  
30 source other than the primary station.

According to a second aspect of the present invention there is provided a telecommunications system comprising a primary station and at least one

secondary station, characterised in that the primary station has means for establishing a two-way communications link between it and the at least one secondary station, in that the at least one secondary station has means responsive to a configuration message transmitted by the primary station for  
5 preparing the secondary station to receive configuration message signals transmitted over at least a one-way channel other than the two-way communications link established between the primary station and the at least one secondary station.

According to a third aspect of the present invention there is provided a  
10 secondary station for use in a telecommunications system comprising a primary station and the secondary station, the primary station having means for establishing a two-way communications link between it and the secondary station, characterised in that the secondary station has means responsive to a configuration message transmitted by the primary station for preparing the  
15 secondary station to receive configuration message signals transmitted over at least a one-way channel other than the two-way communications link established between the primary station and the secondary station.

By means of the present invention a source, separate from the primary station, is used to transmit configuration information signals to the secondary  
20 stations whilst avoiding reducing significantly the revenue raising capacity of the telecommunications system. If desired the source may comprise a broadcast system in which time can be purchased for the transmission of signals other than the normal radio or television signals. Advantages of using a broadcast system include the fact that the infrastructure already exists and  
25 the radio coverage area is extensive and includes areas having difficult topology.

The (or each) secondary station may include a separate receiver for receiving configuration signals from the said source or may have a receiver which can be reconfigured in response to instructions transmitted by the  
30 primary station(s).

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram illustrating a simplified embodiment of a communications system, and

5        Figure 2 is a flow chart relating to configuring the software stored in a secondary station using a broadcast signal.

In the drawings, the same reference numerals have been used to indicate corresponding features.

10        Referring to Figure 1, the simplified communications system comprises a trunking system controller (TSC) 10 which is connected by for example landlines or microwave links to a plurality of geographically spaced primary (or base) stations 12 of which one is shown in Figure 1. A plurality of secondary stations 14 in the form of portable wireless terminals, only one of which is  
15        shown, are carried by users who are able to roam whilst maintaining communication in the radio coverage areas of the respective primary stations, the radio coverage areas generally being termed cells. Also shown in Figure 1 is a broadcast system 16 represented by a single site.

20        The TSC 10 comprises a large computer installation which under software control operates the network of primary and secondary stations in accordance with one or more approved standards such as 3G (or UMTS) and GSM.

25        Each primary station 12 includes a controller 18 which operates in accordance with software stored in a memory (not shown). The controller 18 is connected to one or more transceivers 20, to a protocol stack 22 which stores operating details of the protocol(s) being used and to a configuration manager 24 which initiates configuration changes to the secondary station 14.

30        The secondary station 14 comprises a microcontroller 26 which operates in accordance with software stored in a memory (not shown) and the protocol(s) stored in a protocol stack 28. A transceiver 30 is coupled to the microcontroller 26. If the transceiver 30 is not configurable, that is not capable of adapting itself to signals transmitted on carriers having frequencies and/or



modulation schemes significantly different from those used by the communications system, then another receiver 32, such as a broadcast receiver, is coupled between an antenna 34 and the microcontroller 26 as shown in broken lines. A configuration manager 36 is also coupled to the  
5 microcontroller 26.

In normal operation, telephone or data calls to and from the secondary station 14 are by way of the primary station 12. However if it is necessary to download new or updated configuration software to the secondary station 14 this would required considerable capacity, for example 2Mbytes, from the  
10 system operator if done over the cellular network. This would have the effect of reducing significantly the available revenue earning capacity from the network.

In the system in accordance with the present invention, configuration software is relayed to the secondary station by a source other than the primary  
15 stations 12. This source is the broadcast system 16. In a simplified form, the system 16 comprises a controller 38 which is coupled to a transceiver 40, to a store 42 containing configuration data to be relayed and to a source 44 of radio and/or TV broadcast signals. In the transmission of say TV signals, it is known that there are periods in each frame when the signal content is low or  
20 non-existent and other signals, such as teletext signals, can be transmitted. In implementing the operating method in accordance with the present invention, the cellular network operator purchases some of this unused capacity from the broadcaster and uses it to transmit configuration data substantially continuously. The primary stations 12 transmit control messages 46 to the  
25 secondary stations 14 over the cellular network. These control messages inform the secondary stations how to configure themselves to receive software downloaded by a broadcast signal 48.

The primary stations 12 also transmit signals 50, including updated configuration software, to the broadcast system 16 for storage in the store 42  
30 and subsequent relay onto the secondary stations 14.

The control messages 46 are two-way thereby enabling the user of the secondary stations 14 to negotiate when and if the software is to be upgraded.

Since the transmission of an upgrade in the software may take a relatively long time and may incur additional costs to the user, the user may prefer to defer effecting an upgrade until a more convenient time or may decline to be upgraded as he/she has no desire to incur additional costs. If a user or  
5 secondary station 14 transmits a control signal confirming that the software configuration has been completed, the TSC 10 can determine what proportion of the total number of secondary stations have been upgraded.

Referring to Figure 2, block 52 denotes the secondary station 14 listening to control messages. Block 54 denotes the secondary station 14  
10 being asked if it wants to receive new software at the next update. If the answer is No(N), the flow chart reverts to the block 52. If the user decides that he/she wants to receive the new software (Y) then in block 56 either the transceiver in the secondary station configures its receiver section or selects the receiver 32 in order to be able to receive the broadcast signals 48. Block  
15 58 denotes the downloading of the software. In block 60 a check is made to see if the download of software is complete. If the answer is no (N) the flow chart reverts to the block 58 but if the answer is yes (Y) then in block 62, the secondary station terminates the reconfiguration operation and the transceiver reverts to its normal mode for communication with the respective primary  
20 station 12.

In block 64 the secondary station checks whether there are any calls from the primary station to be stored or responded to or if the user wishes to make an outgoing call. If so (Y), the secondary station sets-up a call but if not (N), it enters a standby mode.

25 In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be  
30 apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of communication systems and component parts therefor and which may be used

instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

## CLAIMS

1. A method of operating a radio system comprising a primary station and at least one secondary station, characterised by establishing a two-way communications link between the primary station and the at least one secondary station, by the primary station transmitting a configuration message to the at least one secondary station, by the at least one secondary station adapting itself to receive configuration information signals transmitted by a source other than the primary station.
2. A method as claimed in claim 1, characterised in that the configuration information signals are transmitted by a broadcast transmitter.
3. A method as claimed in claim 1 or 2, characterised in that the at least one secondary station reconfigures itself in response to the configuration message.
4. A telecommunications system comprising a primary station and at least one secondary station, characterised in that the primary station has means for establishing a two-way communications link between it and the at least one secondary station, in that the at least one secondary station has means responsive to a configuration message transmitted by the primary station for preparing the secondary station to receive configuration message signals transmitted over at least a one-way channel other than the two-way communications link established between the primary station and the at least one secondary station.
5. A telecommunications system as claimed in claim 4, characterised in that the configuration message signals are transmitted by a source other than the primary station.

6. A telecommunications system as claimed in claim 4 or 5, characterised in that the at least one secondary station comprises a reconfigurable transceiver which is able to configure at least its receiver section to receive the configuration message signals.

5

7. A telecommunications system as claimed in claim 4 or 5, characterised in that at least one secondary station comprises a transceiver for communicating with the primary station over the two-way communications link and a receiver for receiving configuration message signals.

10

8. A telecommunications system as claimed in any one of claims 4 to 7, characterised in that the configuration message signals are transmitted over a broadcast radio channel.

15

9. A secondary station for use in a telecommunications system comprising a primary station and the secondary station, the primary station having means for establishing a two-way communications link between it and the secondary station, characterised in that the secondary station has means responsive to a configuration message transmitted by the primary station for preparing the secondary station to receive configuration message signals transmitted over at least a one-way channel other than the two-way communications link established between the primary station and the secondary station.

20

10. A secondary station as claimed in claim 9, characterised in that said means adapts the secondary station to receive configuration message signals transmitted as broadcast signals.

25

11. A method of operating a radio system, substantially as hereinbefore described with reference to the accompanying drawings.

30



12. A telecommunications system constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

5 13. A secondary station constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

## ABSTRACT

**TELECOMMUNICATIONS SYSTEM AND A METHOD OF OPERATING  
THE SYSTEM**

5

A telecommunications system, such as a cellular telephone system, comprises at least one primary station (12) and a plurality of secondary stations (14) which are able to communicate with each other in accordance with any suitable protocol embedded as software in the respective stations.

10

Software configuration or reconfiguration in the secondary stations is effected over the air using a transmitter other than the primary station(s). Such a transmitter may comprise a broadcast transmitter (16) having spare capacity which can be used for purposes other than broadcasting.

15

(Figure 1)

**THIS PAGE BLANK (USPTO)**

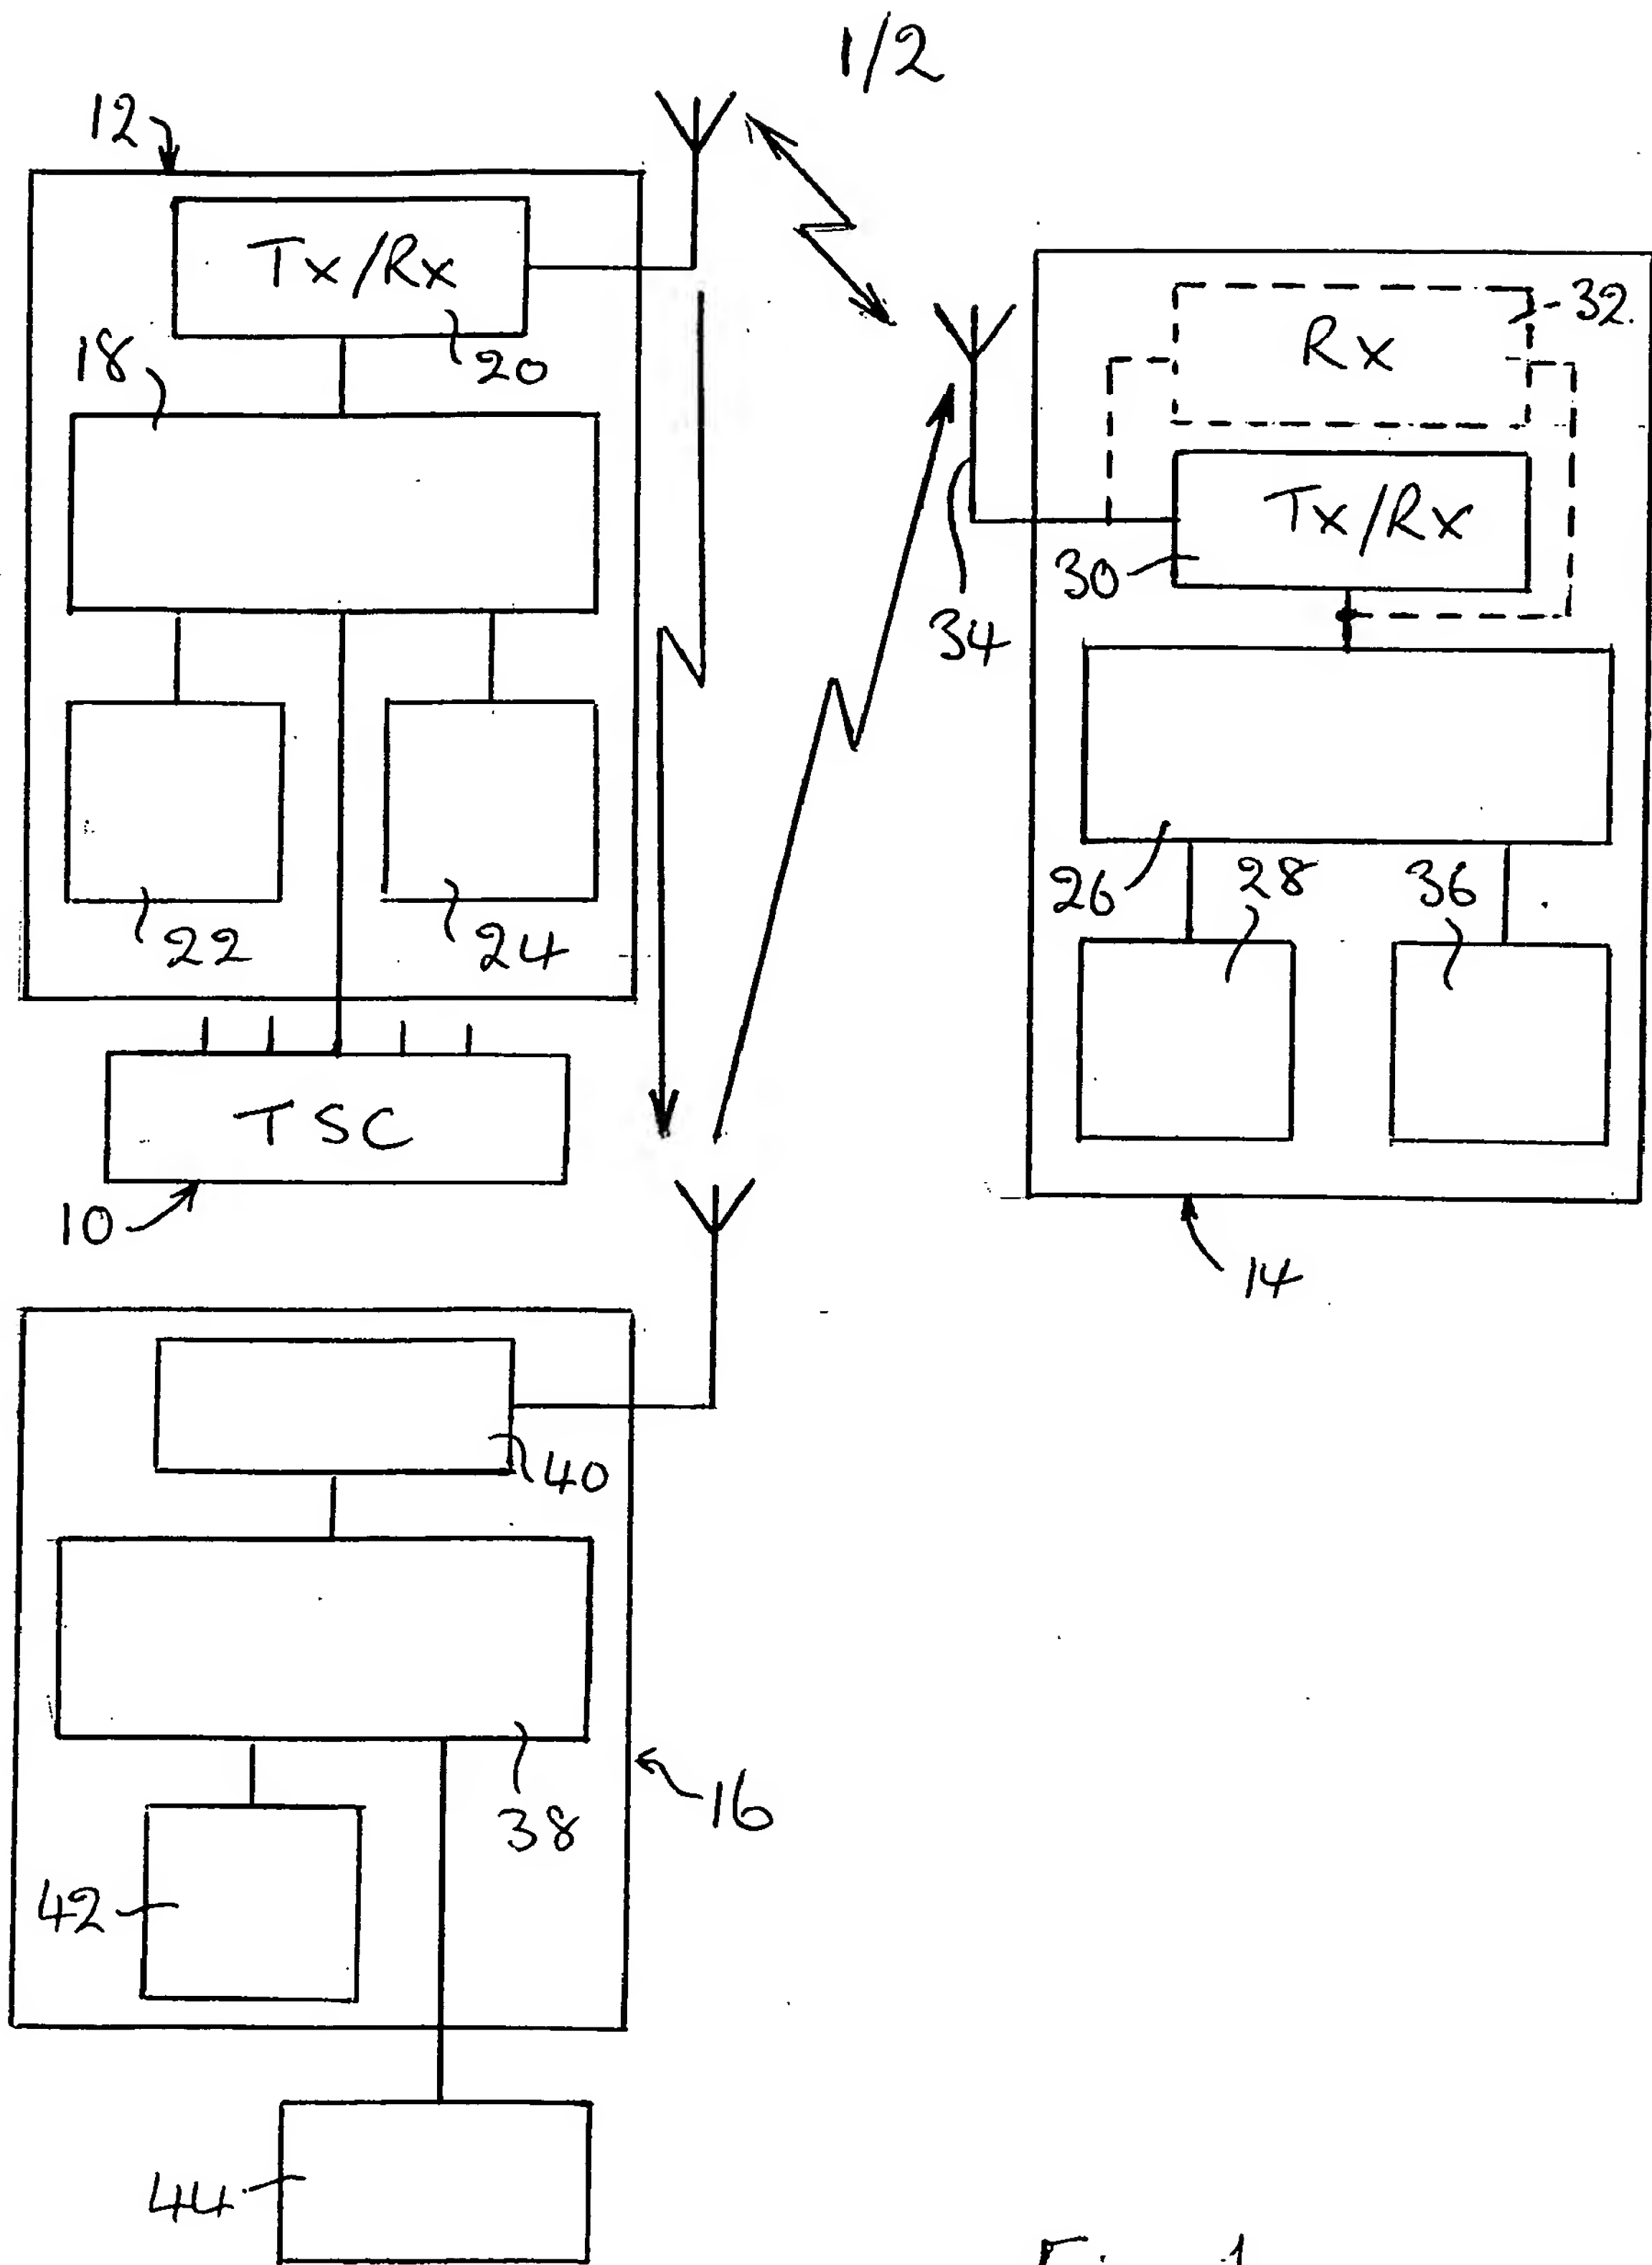


Fig. 1

**THIS PAGE BLANK (USPTO)**



2/2

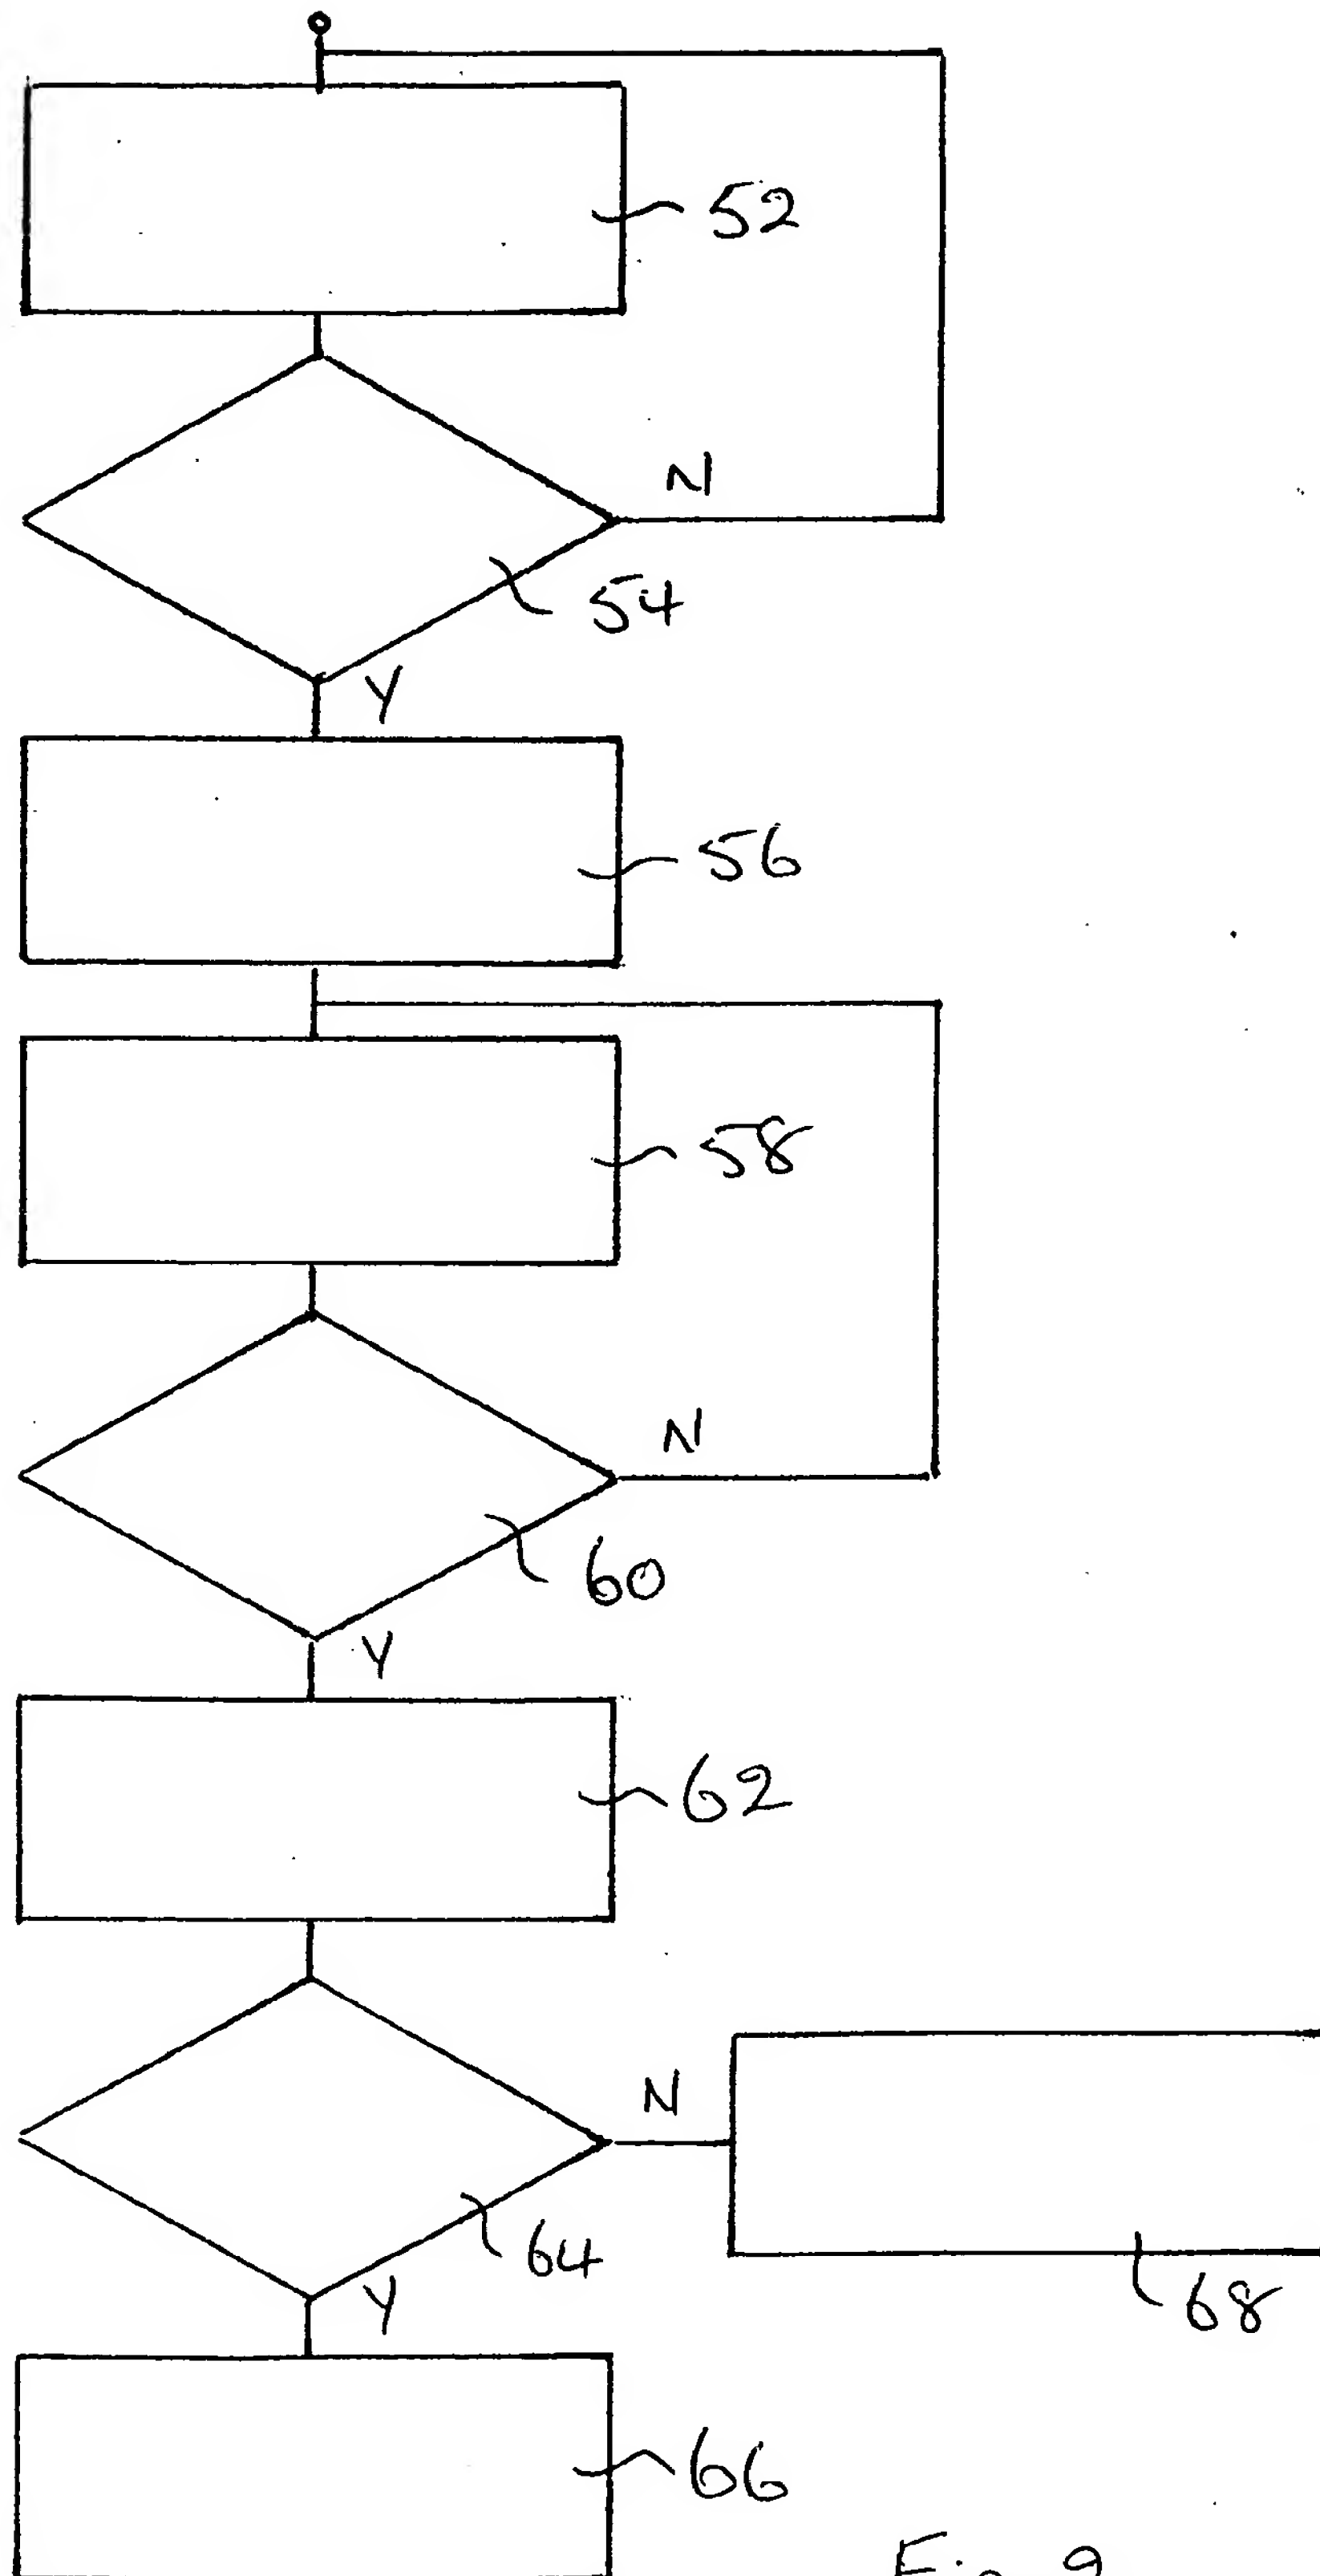


Fig. 2

**THIS PAGE BLANK (USPTO)**